



rugged. interactive

CardioWall® Compact

Order and Installation Manual
For models from October 2023 onwards



Rugged Interactive

Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL231 2RQ

+44 (0) 1726 981 123
www.rugged-interactive.com
hello@rugged-interactive.com

Updated 30/10/2023



Rugged Interactive
Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123
www.rugged-interactive.com
hello@rugged-interactive.com

Contents

Section 1 – Ordering Process

- 1.1 Need to Know
- 1.2 Order and Installation Checklist
- 1.3 Product Overview
- 1.4 Ordering and Installation Timeline
- 1.5 Getting Started
- 1.6 Place Order

Section 2 – Safety Guidelines

- 2.1 Installation Safety Guidelines
- 2.2 In Play Safety Guidelines

Section 3 – Installation

- 3.1 Parts List
- 3.2 Tools and Components List
- 3.3 Installation Overview
- 3.4 Detailed Installation

Section 4 – How to Use

Section 5 – Programs Guide

CardioWall Compact System Specifications

CardioWall Compact Installation Checklist

Next Steps



Rugged Interactive

Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

Section 1 – Ordering Process

1.1 - Need to Know

Installation manual purpose and limitations

This manual is intended to provide guidance only, the installation of the Rugged Interactive product will be under your control. You will be responsible for making sure, upon completion of the installation, it is safe to use. As always, we are here to support you, please get in touch if you are in any doubt.

Regulations

Some countries and states have regulations which may be applicable to the Rugged Interactive products, it is your responsibility to check that the product complies with such regulations. This should be conducted during the planning phase for the installation location.



Rugged Interactive

Unit 1, Callywith Gate
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

1.2 - Order and Installation Checklist

- Contact the Rugged Interactive sales team or a partner / distributor to begin the process.
- Confirm the invoice and delivery address along with date required (lead time is at least 5 weeks), VAT number required for export customers.
- Complete site survey.
- Send purchase order or confirm order.
- Make first payment.
- Discuss graphic requirements and provide logos and branding guidelines.
- Approve graphics.
- Make second payment (required a week before dispatch).
- Schedule time and team members for installation.
- Before install, confirm all tools and components are prepared.
- Organise shipment (Customer collection or delivery organised by Rugged Interactive).
- Receive your order.
- Install the product.
- Test and complete installation checklist.
- Train the team on how to use the product.
- Sounds can be heard when the targets are hit.
- Reveal your new Rugged Interactive product to your guests and customers!



Rugged Interactive
Unit 1, Callywith Gate
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123
www.rugged-interactive.com
hello@rugged-interactive.com

1.3 – CardioWall® Compact Overview


A captivating interactive challenge that allows users to get a lot of exercise without even realising it! The CardioWall can stimulate a huge range of functional exercises and motor skills. Ideal for individual use or group activities.

The CardioWall Compact is available as a single or Duo. With a Duo, players compete head-to-head, a great way of introducing competition.

Featuring a large, fully customisable graphic panel, the CardioWall Compact will be sure to capture the attention of players with its visually striking appearance.



1.4 – Order and Installation Timeline

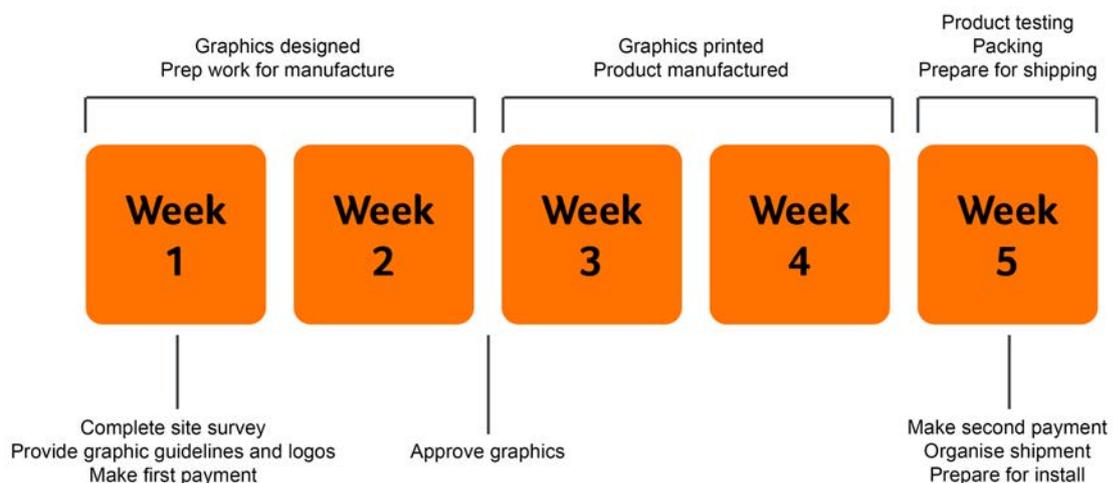

*We do our best to ensure orders are ready on a five-week lead time, however during busy periods or for large orders, the lead time may be longer than outlined here. Lead time will also be affected by graphics guidelines, approval and payment delays.



Rugged Interactive

Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

1.5 - Getting Started

New Parks

During the design process for the new park, incorporate the intended products into the design, product specifications can be found within this manual for the relevant product and CAD files can be supplied upon request.

Existing Parks

When retrofitting existing parks, all specifications can be found within this manual or CAD files are available at request. If further information is required, please get in touch and we will be able to provide further information and guidance.

1.6 - Place Order

To begin the order process with Rugged Interactive:

Email:

Sales@rugged-interactive.co.uk

Or call the Sales Office:

+44 (0) 7585 955 184

HQ/Production Address:

Unit 1 Callywith Court
Callywith Ind. Estate,
Bodmin,
Cornwall
UK
PL31 2RQ

Sales Office Address:

Rugged Interactive,
Future Space,
UWE North Gate,
Filton Road,
Bristol,
UK
BS34 8RB



Rugged Interactive
Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123
www.rugged-interactive.com
hello@rugged-interactive.com

Section 2 - Safety Guidelines

2.1 Installation Safety Guidelines

Before installing any Rugged Interactive product, please read the following:

Dos:

- Ensure that a Site Survey form has been completed prior to installation.
- Have ready suitable equipment, tools and/or man power.
- Observe correct manual handling techniques whilst moving and installing the equipment.
- If being installed onto a wall, the product **MUST** be mounted onto a wall of a construction capable of supporting its weight and gameplay. If possible, avoid stud walls or unsupported portal infills. If in doubt always contact a suitably qualified surveyor to check.
- Visually check the product for any signs of damage, component failure and/or missing parts.
- To prevent electric shock, keep all electric components away from contact with water.
- Ensure to take anti-static precautions.
- Wear appropriate clothing: do not wear loose clothing or jewellery.
- Long hair should be tied back.
- Tidy back loose cables that could become a tripping hazard.
- Ensure that the playing area is clear.
- Immediately inform Rugged Interactive for maintenance advice if you have concerns.

Don'ts:

- Do not wear shoes with leather soles or high heels.
- Do not use any tools that are not specifically recommended by the manufacturer.
- Do not use the surface of the trampoline to balance ladders or alike.
- Do not distract others while they are installing the product.

2.2 In Play Safety Guidelines

Please ensure you read the following points before using the equipment:

Dos:

- Ensure that a Site Survey form has been completed prior to installation.
- Have ready suitable equipment, tools and/or man power.
- Observe correct manual handling techniques whilst moving and installing the equipment.
- If being installed onto a wall, the product **MUST** be mounted onto a wall of a construction capable of supporting its weight and gameplay. If possible, avoid stud walls or unsupported portal infills. If in doubt always contact a suitably qualified surveyor to check.
- Visually check the product for any signs of damage, component failure and/or missing parts.
- To prevent electric shock, keep all electric components away from contact with water.
- Ensure to take anti-static precautions.
- Wear appropriate clothing: do not wear loose clothing or jewellery.
- Long hair should be tied back.
- Tidy back loose cables that could become a tripping hazard.
- Ensure that the playing area is clear.
- Immediately inform Rugged Interactive for maintenance advice if you have concerns.

Don'ts:

- Do not wear shoes with leather soles or high heels.
- Do not use any tools that are not specifically recommended by the manufacturer.
- Do not distract others while they are installing the product.

1.2 In Play Safety Guidelines

Please ensure you read the following points before using the equipment:

Dos:

- Before beginning any exercise program, it is recommended that you consult with your doctor.
- Children under the age of 7 years must always be supervised by an adult (over 16 years) when using the equipment and/or recommended accessories.
- Visually check the equipment before using it for any signs of damage, component failure or loose cables that could become a tripping hazard. Report any concerns, e.g. loose holds or damaged equipment, to a member of staff immediately.
- Ensure you familiarise yourself with any additional facility rules that may apply.
- Ensure that the play area in front of the equipment is clear before attempting to participate.
- Only participate if you are in good physical condition. Participate only within your capabilities / recommended exercise level.
- Wear appropriate clothing.
- Remove all items from your pockets prior to participation.
- Long hair should be tied back.
- Before use, loosen up with warm up exercises and stretches.
- Only those participating are allowed in the activity area. If waiting to participate, stand back at a safe distance from the equipment.
- Report any unusual or inappropriate behaviour to a member of staff immediately.
- If you get tired, leave the equipment / activity area and take a break.
- If you feel any pain, dizziness, nausea or any other abnormal symptoms, **STOP YOUR WORKOUT IMMEDIATELY**. Consult your doctor immediately. Incorrect or excessive training may lead to injuries.

Don'ts:

- Do not attempt to use any of the equipment without undertaking instruction / training carried out by an appropriate instructor.
- Do not participate if you are unwell or have any pre-existing medical conditions including heart, back, neck, bone and/or muscle conditions.
- Do NOT work to exhaustion.
- Do not participate if you are or maybe pregnant.
- Do not wear loose clothing or jewellery (including studs and watches). Clothing should not have any hard or sharp points (such as buckles, studs, toggles or alike).
- Do not wear shoes with leather soles, high heels, sandals, boots or bare feet.
- No food, drink or chewing gum during participation.

CardioWall® Compact Installation and Instruction Manual: *Safety Guidelines*

- No phones or cameras in the activity area.
- Do not leave clothing or personal belongings around the activity areas.
- Do not participate under the influence of alcohol and/or drugs.
- Do not distract others while they are using the equipment.
- Do not sit, lie, stand or rest on or under the activity equipment.
- Do not use any accessories that are not specifically recommended by the manufacturer. These might cause injuries or cause the equipment to fail.

NOTE: This activity can be great fun, but it can also be dangerous. There is a risk of serious injury if care is not taken when using the equipment. Use of this equipment is physically demanding: this is a high-impact, full body activity which requires intense focus, awareness of your body's strengths and limitations, awareness of the environment around you and extreme caution.



Rugged Interactive

Unit 1, Callywith Gate
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

Section 3 - Installation

3.1 - Parts List

Please check off the received parts for the installation and alert Rugged Interactive immediately if anything is missing.

1 x Compact Wall. *	<input type="checkbox"/>
1 x Spare Pod.	<input type="checkbox"/>
4 x Bungs. *	<input type="checkbox"/>
4 x M8 x 50 coach screws. *	<input type="checkbox"/>
4 x M8 x 25 washers. *	<input type="checkbox"/>
Poster with Velcro	<input type="checkbox"/>
Manual.	<input type="checkbox"/>

* Please note, quantities are for a single Compact, if a Compact Duo has been ordered, double these quantities.

Also included if a Duo has been ordered:

1 x Combat cable	<input type="checkbox"/>
------------------	--------------------------

Please note, a mobile stand is also available to be ordered with a CardioWall Compact.

3.2 - Tools and Components List

Arrange the necessary tools and the team to install the product.

- Ladder.
- Spirit level.
- Cordless drill – with torque adjuster to avoid over-tightening the screws.
- Industrial vacuum cleaner.
- Dustpan and brush.
- SDS impact drill.
- Socket set.
- A set of No.2 Pozi bits.
- A set of screwdrivers.
- A set of Hex keys



Rugged Interactive

Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

3.3 - Installation Overview

Below is an overview of the steps needed to install CardioWall Compact. More detail for the process is provided in the following pages. Please read through ALL of this prior to beginning the installation and if you are in any doubt, contact Rugged Interactive.

If you have any concerns on how or what the product is installed to, contact a structural engineer prior to beginning the installation.

STEP 1: Mark out mounting points.

STEP 2: Drill necessary holes.

STEP 3: Mount CardioWall Compact.

STEP 4: Attach combat cable (if Duo purchased).

STEP 5: Turn on CardioWall Compact.

STEP 6: Test.

STEP 7: Check all is secured.

STEP 8: Attach bungs.

STEP 9: Stress relief cables.

STEP 10: Enjoy your CardioWall Compact!



rugged. interactive

Rugged Interactive

Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

3.4 – Detailed Installation

Read this manual **before** installing the CardioWall Compact units.

Installation Guidelines:

- Complete the **Site Survey** form prior to delivery and/or installation: <https://goo.gl/Rs3n5u>
- Please send a completed **Installation Checklist** after any installation to Rugged Interactive.
- A typical installation should take 2 people about 2 hours.
- No obstructions or protrusions in the installation area: e.g. skirting boards, pipes, cables and wiring conduits.
- Avoid trapped and/or pinched cables.
- Use good practice when running data cables to and from products, external pods and sensors. Support long cables at least every 50 cm and provide adequate strain relief for connection points.
- Power supply to be within 1000 mm of each CardioWall. Standard power cables are positioned bottom right.
- To prevent electric shock, keep all electric components away from contact with water.
- **IMPORTANT:** Take anti-static precautions.

Structure:

- The units must be mounted to a flat/level construction capable of supporting its weight and gameplay. (Uneven walls and surfaces make alignment and fitting very difficult.)
- The wall area for installation will need to exceed the width and height of the CardioWall (refer to System Specifications) plus an additional 10 cm of clear space around each edge. If two CardioWalls are being positioned side-by-side, leave a gap of 150 cm - 300 cm.
- Typical suitable construction would be block built, portal frame with structural infills or brick built.
- Alternatively, mount onto 18 mm plywood (12 mm minimum) mechanically mounted to a steel framework (50 mm box minimum). Preferably, the plywood should be painted prior to installation.
- Adequate holes will need to be cut during installation to provide clearance for cable access to rear if required.
- Do not fix to plasterboard faced partition. Avoid stud walls or unsupported portal infills.

Fixings:

- The manufacturer will supply fixings.
- Use hex-headed screws of 50-70 mm length (2") x M10 for a plywood structure.
- Use Rawl Plugs (plastic wall plugs) if mounted to a solid block or brick wall.
- 10 x 35 'penny' washers to spread the load at each bolt head are recommended.
- All fixings must be tight and secure.

Required Tools and Consumables:

- A spirit level – to check floor is level before installation and that the CardioWall is level during installation.
- An industrial vacuum cleaner.
- A dustpan and brush.
- A SDS impact drill.
- A cordless drill – with torque adjuster to avoid over-tightening of screws.
- A set of No.2 pozi bits.
- A set of screwdrivers:
 - A small electrical-type flat-bladed screwdriver to unclip the CAT5 connectors from the pods.
 - A tiny flat-bladed screwdriver to adjust the volume on the main hub.
- A socket set.

Suggested Extras:

- 3 m of self-adhesive 'mini' box trunking to secure the power cable.
- An extension cable in case the power supply is not within 1000 mm of the base of the CardioWall. (CardioWalls are supplied, unless otherwise requested, with a power adaptor cable that extends 1000 mm from the base of the CardioWall.)
- Cleaning cloth and gentle cleaning spray.

Installation Heights:

- Mount flat to the ground or raised to a desirable level, depending on primary user group.
- Recommended height for CardioWall Compact: 300 - 780 mm above ground level

Operating Environment:

- Keep out of direct sunlight; bright sunlight can affect the LED pod sensors.
- Keep indoors and dry.
- Optimum ambient temperature: 5°C to 30°C. Avoid extreme fluctuations of temperature.
- Area clear in front of the CardioWall: 200 cm minimum.



Other Recommendations:

- Instruction / training carried out by an appropriate instructor to all new users.
- A waiting / spectating area positioned nearby is advised.
- A leaderboard to go with each unit is highly recommended.

IF YOU ARE IN ANY DOUBT, CALL RUGGED INTERACTIVE DIRECTLY ON +44 (0) 1726 833 882

CardioWall Compact Installation



01

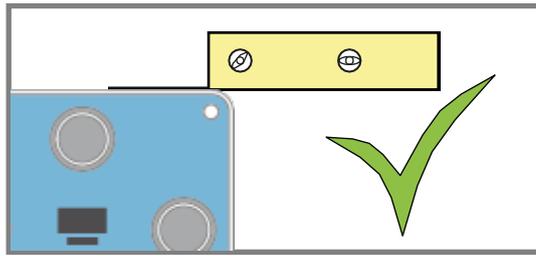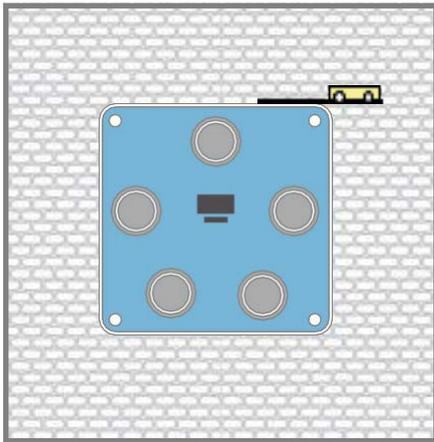

2 people required: one to hold the main body in place; one to ensure it is level.



See Installation Heights (Section 1)

02

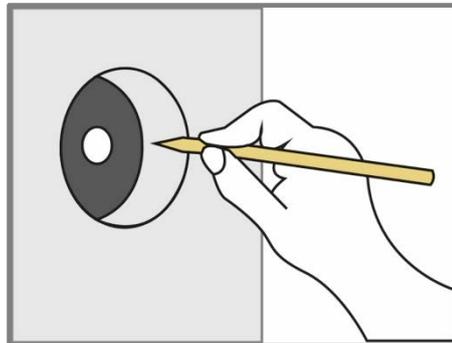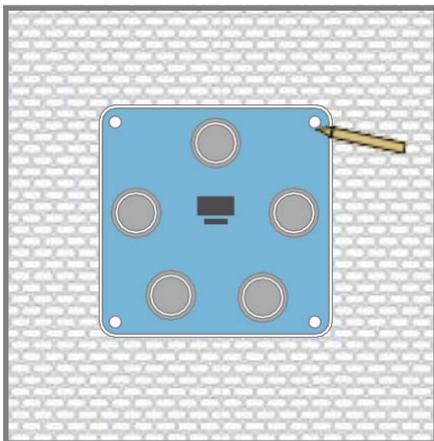

2 people required: one to hold the main body in place; one to clearly mark holes x 4



03

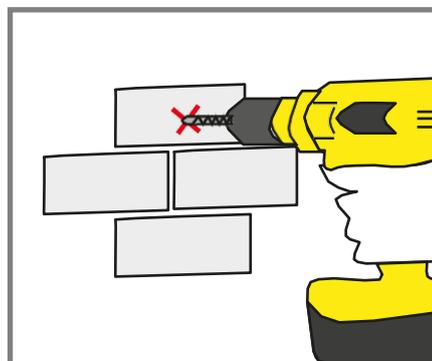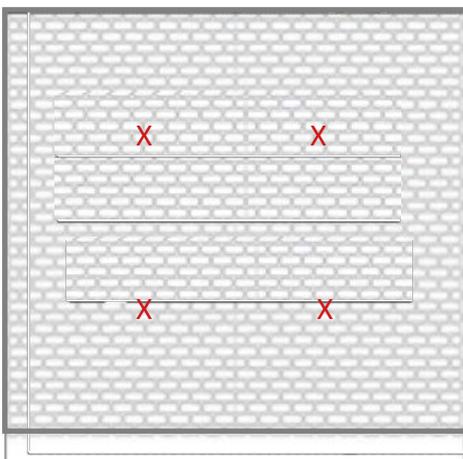

Drill holes and insert mountings x 4.



CardioWall FreeStyle Installation (cont.)

04

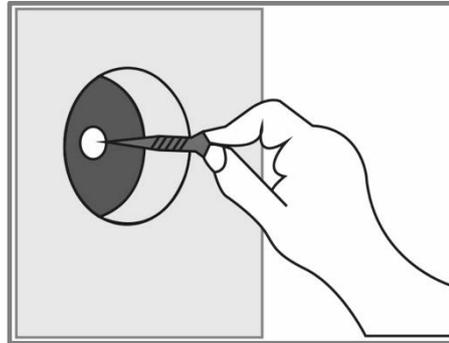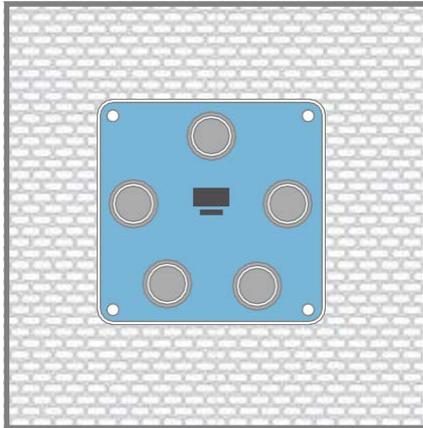

Position appropriate fixings by hand in all corners and tighten with a tool x 4, checking it is level.

05

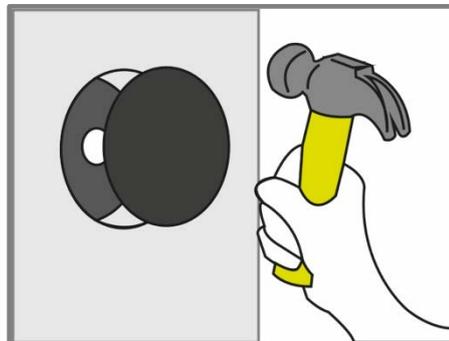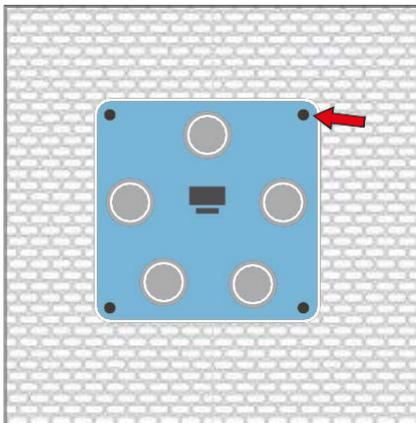

Position fixing covers and push in to place with a hammer x 4.

Connecting CardioWall Compact Duo

Connecting two CardioWall Compacts will activate the Combat program.

The following instructions assume:

- Both CardioWall Compacts are not attached to the wall.
- A standard CAT5 network cable (3-5 m long) is available.

The CardioWall will need to be tilted forward slightly so the CAT5 network cable can be plugged into the network cable socket on the back of the CardioWall; bottom left-hand side or rear.

Route the CAT5 cable carefully where you require it, then plug the other end of the CAT5 cable into the network socket on the back of the second CardioWall; bottom left-hand side or rear.

Check that the walls are connected correctly by checking that the Combat pods (bottom left on both CardioWalls) are lit red and have become active.

Starting the Combat program.

Hit the “Combat” pod on one of the CardioWall Compact walls. The CardioWall Compact will sound, “Play the other wall.” Hit the “Combat” pod on the second CardioWall Compact. The program shall begin.

NOTES:

- On a Standard CardioWall Compact, Combat will override CardioBeat.
- On an Ability CardioWall Compact, Combat will override SoundBoard.



rugged. interactive

Rugged Interactive

Unit 1, Callywith Court,
Callywith Gate Industrial Estate,
Bodmin, Cornwall, UK
PL31 2RQ




CardioWall – Pod Removal and Installation

Removing the Pods

Read this manual before removing or installing any pods.

Do not worry which order the pods come off in. They can be refitted in any order.



Retain all screws & washers.

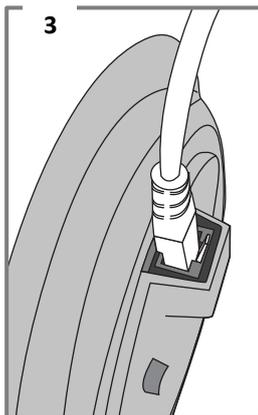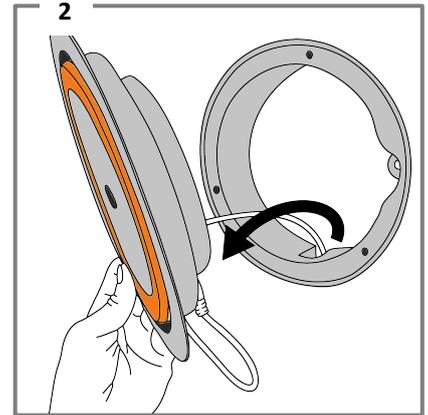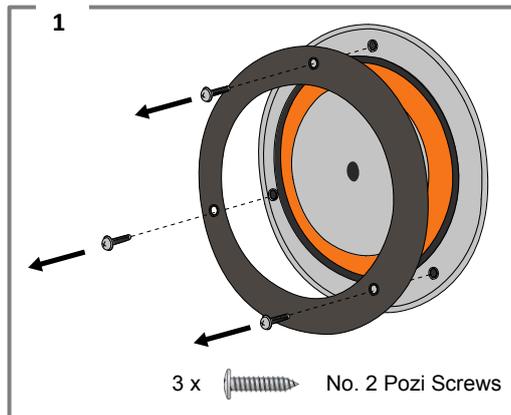





NOTE:

To remove the CAT5 cables, push the clip to release.

Remove the CAT5 cables **CAREFULLY**.

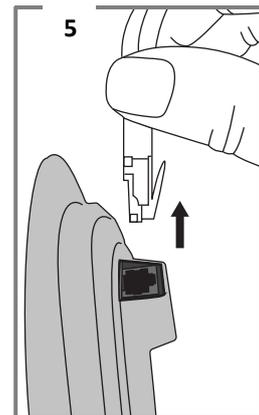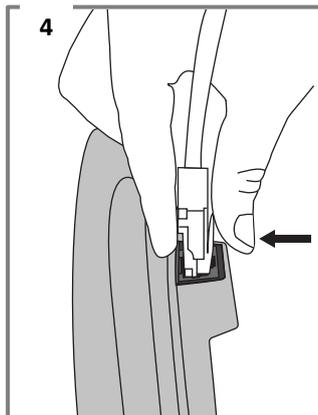

Installing the Pods

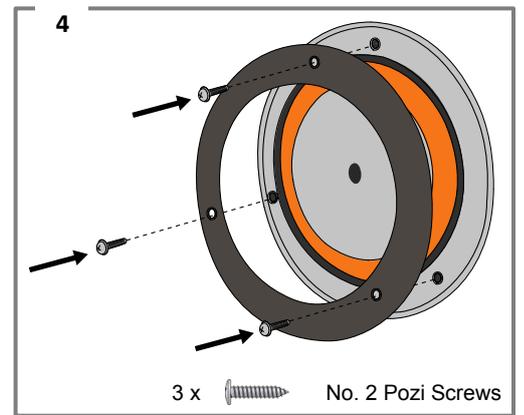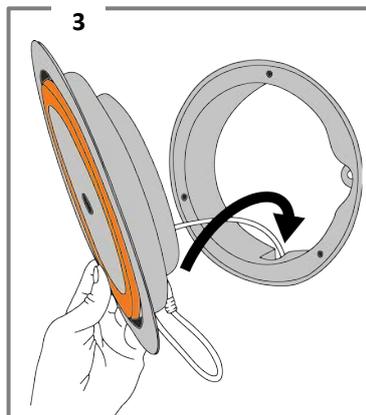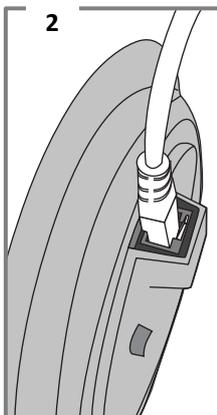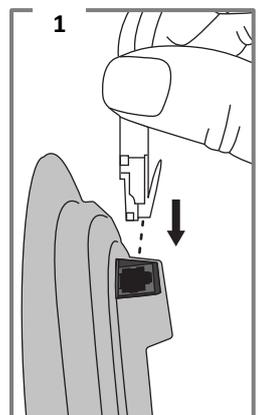

Ensure the clip is firmly connected. A click should be heard when inserted correctly.

The securing ring **MUST** be fitted to the new pods.



Rugged Interactive
Unit 1, Callywith Court
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123
www.rugged-interactive.com
hello@rugged-interactive.com

Section 4 - How to Use

4.1 Standard CardioWall

4.1.1 Idle State

4.1.2 Menu

4.1.3 End of Program

4.2 Ability CardioWall

4.2.1 Idle State

4.2.2 Menu

4.3.3 SoundBoard

4.2.4 End of Program

4.1 Standard CardioWall

4.1.1 Idle State

On power up, the CardioWall will sound a 'laugh' and will turn to its idle state. Initially the dot matrix will display the **Hub Software Version Number** for the CardioWall.

The Standard CardioWall has one **Menu** option as standard where the playing time and level for specific programs can be set.

The Standard CardioWall has **five programs**:

1. **ClearOut**
2. **ClusterShot**
3. **Chaser**
4. **CardioBeat**
5. **Combat** (only active when linked to a second CardioWall Compact Duo)

In this idle state, the **green pods** are QuickStart options for the programs. The **blue pod** is the menu option [Figure 4.1].

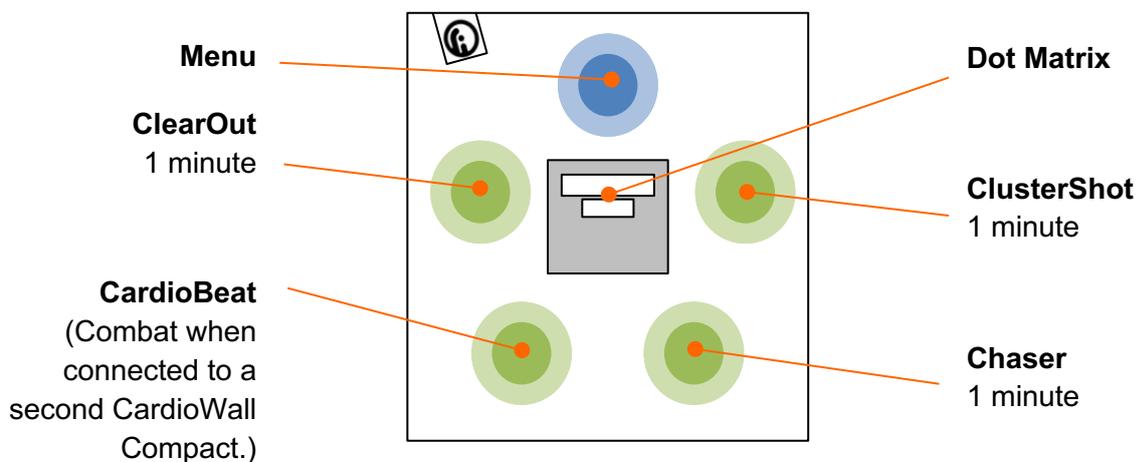


Figure 4.1: CardioWall Idle State

4.1.2 Menu

Select the **Menu** option to choose the playing duration and the range of playable pods for **ClearOut**, **Chaser** and **ClusterShot**. For **ClusterShot**, the difficulty level can also be set.

On selection of the **Menu** option, the CardioWall will sound “Select programme.” This will then be followed by “ClearOut,” “ClusterShot,” then “Chaser,” which will sound in synchronisation with the respective pods flashing up. This routine will be repeated until an option is selected or the CardioWall times out after 20 seconds.

Select the **blue pod** to return the CardioWall to its idle state. Select either the **yellow**, **green** or **red** pods to set the playing options for **ClearOut**, **ClusterShot** or **Chaser** respectively [Figure 4.2].

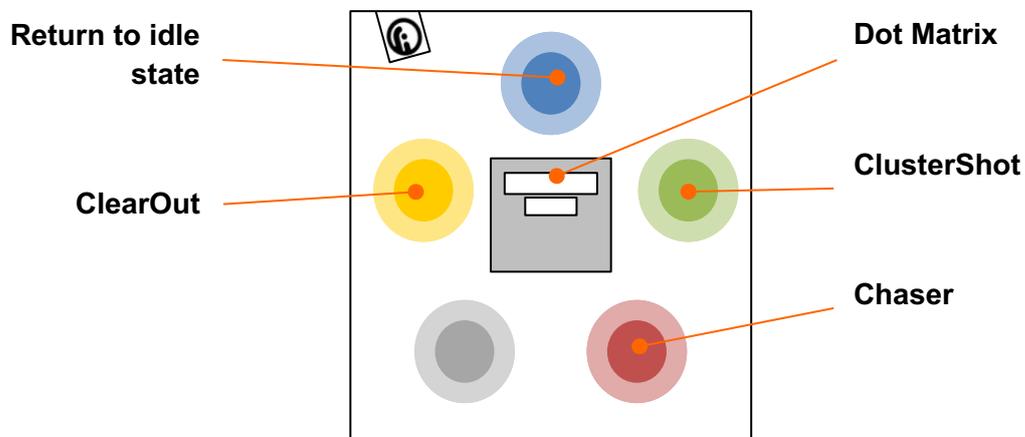


Figure 4.2: CardioWall Menu

Once the chosen program has been selected, the CardioWall will sound “Select time.” Select the **yellow pod** to increase the duration of the program. Select the **pink pod** to decrease the duration of the program. Select the **green pod** to confirm the chosen duration. The program duration will be shown on the time display [Figure 4.3].

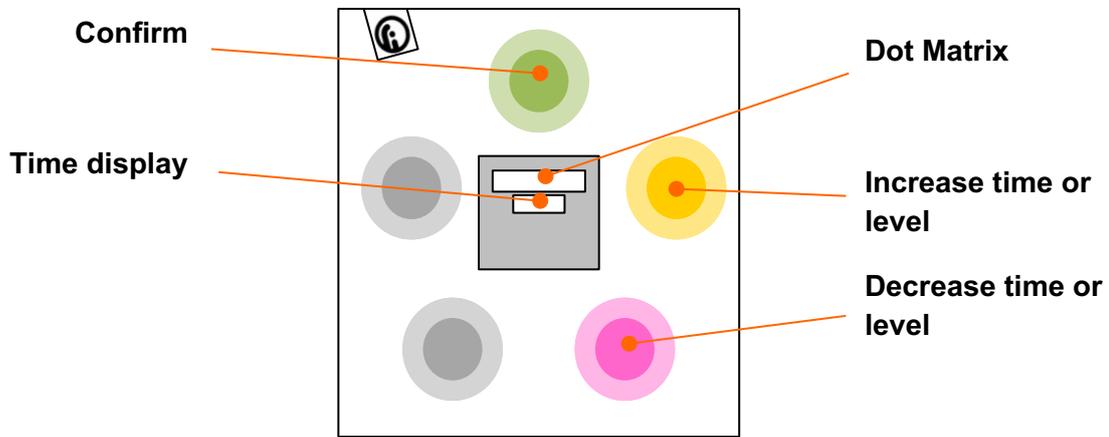


Figure 4.3: CardioWall Time Select

In the **ClusterShot** options menu, once the chosen program duration has been confirmed, the CardioWall will sound “Select level.” The lights will be illuminated in the same way as **Figure 4.3**.

Select the **yellow pod** to increase the difficulty level. Select the **pink pod** to decrease the difficulty level. Select the **green pod** to confirm the chosen difficulty level. The difficulty level will be shown on the time display.

NOTE: For **ClearOut** and **Chaser** programs, the select difficulty level option is unavailable as there is only one level setting available.

4.1.3 End of Program

At the end of any program, the CardioWall will sound, “Would you like to play again?” The pods will light up as shown in **Figure 4.4**. Selecting the **green pod** will replay the program. Selecting any of the **red pods** will return the CardioWall to its idle state.

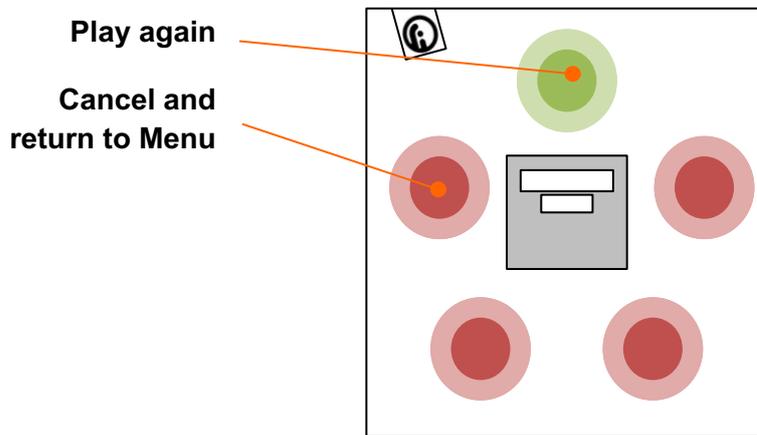


Figure 4.4: “Would you like to play again?”

NOTE: At any time, if the CardioWall behaves unexpectedly, wait for at least 20 seconds for the unit to reset to its idle state.

4.2 Ability CardioWall

4.2.1 Idle State

On power up, the CardioWall will sound a 'laugh' and will turn to its idle state. Initially the dot matrix will display the **Hub Software Version Number** for the CardioWall.

The Ability CardioWall has one **Menu** option as standard where the playing time and level for specific programs can be set.

The Ability CardioWall has **five programs** as standard:

1. **ClearOut**
2. **ClusterShot**
3. **Chaser**
4. **SoundBoard**
5. **Combat** (only active when linked to a second CardioWall Compact Duo)

In this idle state, the **green pods** are QuickStart options for the programs. The **blue pod** is the menu option [Figure 4.5].

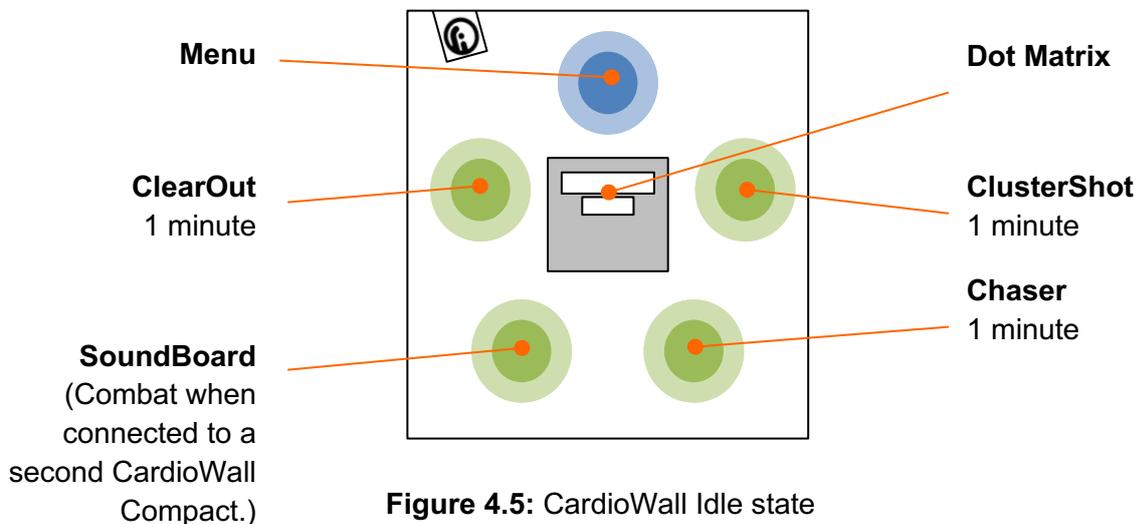


Figure 4.5: CardioWall Idle state

4.2.2 Menu

Select the **Menu** option to choose the playing duration and the range of playable pods for **ClearOut**, **Chaser** and **ClusterShot**. For **ClusterShot**, the difficulty level can also be set.

On selection of the **Menu** option, the CardioWall will sound “Select programme.” This will then be followed by “ClearOut,” “ClusterShot,” then “Chaser,” which will sound in synchronisation with the respective pods flashing up. This routine will be repeated until an option is selected or the CardioWall times out after 20 seconds.

Select the **blue pod** to return the CardioWall to its idle state. Select either the **yellow**, **green** or **red** pods to set the playing options for **ClearOut**, **ClusterShot** or **Chaser** respectively [Figure 4.6].

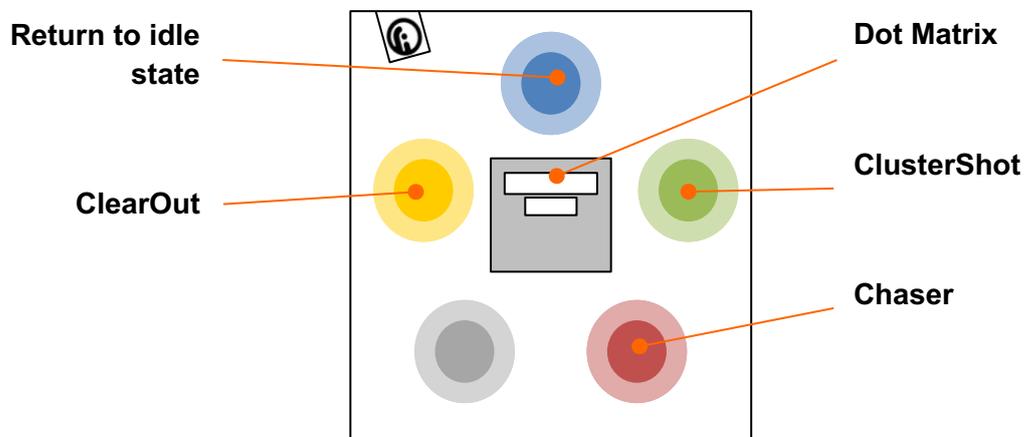


Figure 4.6: CardioWall Menu

Once the chosen program has been selected, the CardioWall will sound “Select time.” Select the **yellow pod** to increase the duration of the program. Select the **pink pod** to decrease the duration of the program. Select the **green pod** to confirm the chosen duration. The program duration will be shown on the time display [Figure 4.7].

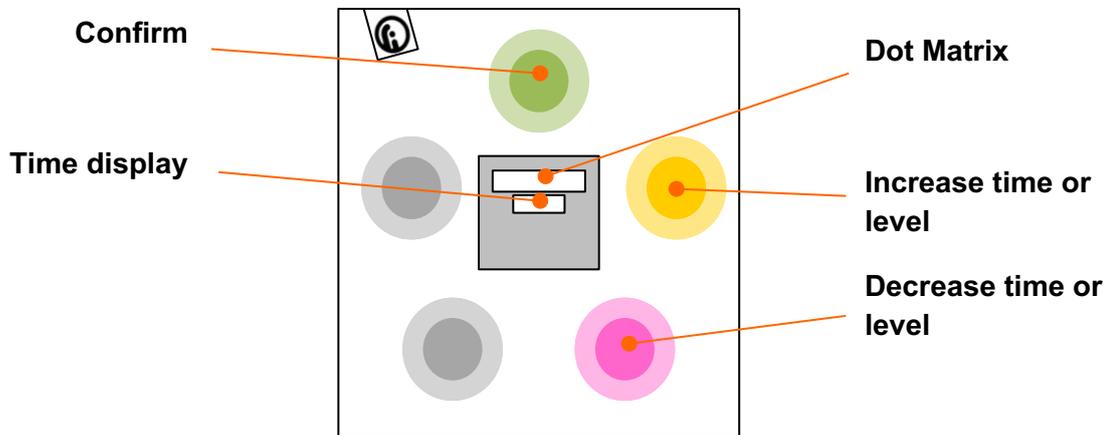


Figure 4.7: CardioWall Time Select

In the **ClusterShot** options menu, once the chosen program duration has been confirmed, the CardioWall will sound “Select level.” The lights will be illuminated in the same way as **Figure 4.7**.

Select the **yellow pod** to increase the difficulty level. Select the **pink pod** to decrease the difficulty level. Select the **green pod** to confirm the chosen difficulty level. The difficulty level will be shown on the time display.

NOTE: For **ClearOut** and **Chaser** programs, the select difficulty level option is unavailable as there is only one level setting available.

4.2.3 SoundBoard

SoundBoard is an interactive, multi-sound, non-competitive sound synthesiser. It is popular with users whom have sensory processing disorders such as autism, brain injury and dementia.

On selection of **SoundBoard**, 5 pods will light up in various colours [Figure 4.8]. Each lit pod is a sound set. Select a sound set to experience 5 different sounds with in that set.

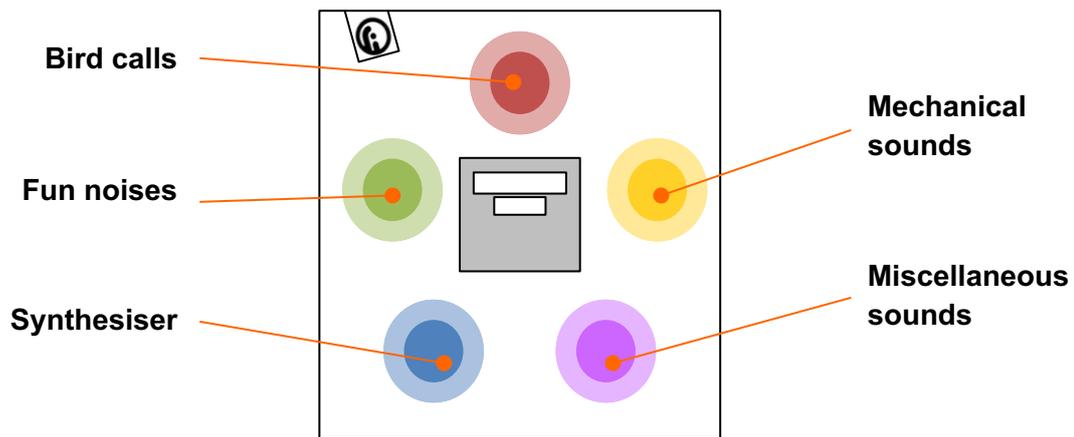


Figure 4.8: CardioWall SoundBoard

NOTE: At any time, if the CardioWall behaves unexpectedly, wait for at least 30 seconds for the unit to reset to its idle state.

4.2.4 End of Program

At the end of any program, the CardioWall will sound, “Would you like to play again?” The pods will light up as shown in **Figure 4.8**. Selecting the **green pod** will replay the program. Selecting any of the **red pods** will return the CardioWall to its idle state.

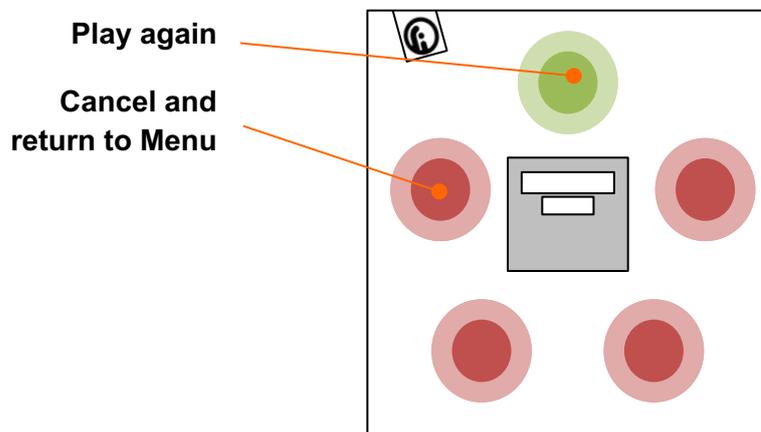


Figure 4.9: “Would you like to play again?”

NOTE: At any time, if the CardioWall behaves unexpectedly, wait for at least 30 seconds for the unit to reset to its idle state.



Rugged Interactive

Unit 1, Callywith Gate
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

Section 5 - Programs Guide

ClearOut

- Summary:** For repetitive exercise, stamina building and core stability. Popular within circuit training routines and effective with all types of accessory. A good alternative to body weight squats.
- CardioWall:** Standard and Ability
- Gameplay:** All pods will appear **green**. On selection of each illuminated pod, the light will turn out. Once all lit pods are cleared, all pods will reappear **blue**. Once all of the **blue pods** are cleared, all pods will reappear **red**. Once all of the **red pods** are cleared, all pods will reappear **green**, etc.
- Aim:** To clear as many illuminated pods as possible within the given time limit.
- Scoring system:** +1 point for each pod hit
- Duration:** 0.5 / 1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 minutes

NOTE: At any time, if the CardioWall behaves unexpectedly during gameplay, wait for at least 30 seconds for the unit to reset to its idle state. For gameplay greater than or equal to 10 minutes, wait for at least 2 minutes for the unit to reset to its idle state. This longer time-out period is designed to allow multiplayer circuit training.

ClusterShot

Summary:	A high intensity challenge of speed and visual awareness. Mentally testing.
CardioWall:	Standard and Ability.
Gameplay:	Pods will illuminate in clusters of 3, 4 or 5 at random. The illuminated pods will firstly appear green , then yellow , then red . Once an entire cluster of lit pods are cleared, a new cluster of lit pods will appear at random.
Aim:	To earn as many points as possible within the given time limit by hitting the illuminated pods quickly.
Difficulty:	Beginner (Slow) – Level 1 Intermediate (Medium) – Level 2 Expert (Fast) – Level 3
Scoring system:	+3 point for each green pod hit +2 point for each yellow pod hit +1 point for each red pod hit
Duration:	0.5 / 1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 minutes

NOTE: At any time, if the CardioWall behaves unexpectedly during gameplay, wait for at least 30 seconds for the unit to reset to its idle state. For gameplay greater than or equal to 10 minutes, wait for at least 2 minutes for the unit to reset to its idle state. This longer time-out period is designed to allow multiplayer circuit training.

Chaser

Summary:	A pure speed and reaction challenge which also tests peripheral vision.
CardioWall:	Standard and Ability.
Gameplay:	A single red pod will illuminate at random. Other pods will be green . On selection of the red pod (the chaser), another pod will reappear red .
Aim:	To hit as many red pods with in the given time limit as possible.
Scoring system:	+1 point for each red pod hit -1 point for each green pod hit
Duration:	0.5 / 1 / 2 / 3 / 4 / 5 / 10 / 15 / 20 / 25 / 30 minutes

NOTE: At any time, if the CardioWall behaves unexpectedly during gameplay, wait for at least 30 seconds for the unit to reset to its idle state. For gameplay greater than or equal to 10 minutes, wait for at least 2 minutes for the unit to reset to its idle state. This longer time-out period is designed to allow multiplayer circuit training.

CardioBeat

- Summary:** A version of the 'bleep test.' A perfect measure of a user's fitness, including hand speed, accuracy and stamina. The first port of call for personal trainers with a new client. Helps to develop hand-eye coordination.
- CardioWall:** Standard only.
- Gameplay:** All pods will illuminate. Once each illuminated pod is hit, the light will turn out. All pods must be cleared within the given time to clear the level. If the level is cleared in time, a beep will sound and all pods will reappear. This is repeated until the user is unable to clear the entire wall of illuminated pods. The time that the lights are illuminated for decreases as the level increases, steadily increasing the games difficulty.
- Aim:** To clear the entire wall of illuminated pods as many times as possible with in time restrictions.
- Difficulty:** Increases as the level increases.
- Scoring system:** Level increases by 1.0 for each cleared level
Level increases by 0.1 point for each pod hit
e.g. L7.2

NOTE: At any time, if the CardioWall behaves unexpectedly, wait for the program to end and for the unit to reset to its idle state.

SoundBoard

Summary: An interactive, multi-sound, non-competitive sound synthesiser. Popular with users whom have sensory processing disorders such as autism, brain injury and dementia.

CardioWall: Ability only.

Gameplay: 5 pods will light up in various colours. Each lit pod is a sound set. Select a sound set to experience 5 different sounds with in that set.

Sounds key - top left to bottom right:

Red – bird calls

Green – fun noises

Yellow – mechanical sounds

Blue – synthesiser

Pink – miscellaneous

Aim: Play and enjoy the sounds.

Scoring system: N/A

Duration: 3 minutes

NOTE: At any time, if the CardioWall behaves unexpectedly during gameplay, wait for at least 30 seconds for the unit to reset to its idle state.

Combat – Two-Player Program

- Summary:** This is a two-player program and only works when two CardioWalls are connected.
- A direct dual between players. Intense and great fun. Builds a competitive spirit and improves social interaction between competitors in addition to improving speed, reaction time and hand-eye coordination.
- CardioWall:** Standard and Ability.
- Gameplay:** Every time a pod is hit by one player, a light will reappear on the opposite player's wall. The first player to clear all the lights on their wall will be the winner.
- Aim:** To clear the wall of illuminated lights before the other player.
- Scoring system:** +1 point for each pod hit

NOTE: At any time, if the CardioWall behaves unexpectedly during gameplay, wait for at least 30 seconds for the unit to reset to its idle state.



Rugged Interactive

Unit 1, Callywith Court,
Callywith Industrial Estate,
Bodmin, Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

CardioWall Compact System Specifications

Dimensions and Weights:

	Approx. Shipment Details		Fully Assembled Details	
	Size (mm)	Weight	Size (mm)	Weight
CardioWall Compact Duo (<i>pair</i>)			1185 x 60 x 1185 (<i>per CardioWall</i>)	20 kg
CardioWall Compact (<i>single unit</i>)			1185 x 60 x 1185	20 kg
Mobile Stand (<i>without CardioWall</i>)			1420 x 830 x 1070	80 kg

Power Supply:

AC: 110-230V, 50-60Hz, 13A

Warranty:

1 year on electronics. 3 years on all other parts.

Regulatory Requirements:

CE Approved.

Operating Environment:

Indoors: keep dry and out of direct sunlight.

Mount to a wall of a suitable construction.

Area required clear in front of the CardioWall: depth of 1 m minimum.

Optimum ambient temperature: 5°C to 30°C. Avoid extreme

Other:

All parts designed for easy maintenance. Replacement LED pods can be swapped out by staff in seconds.

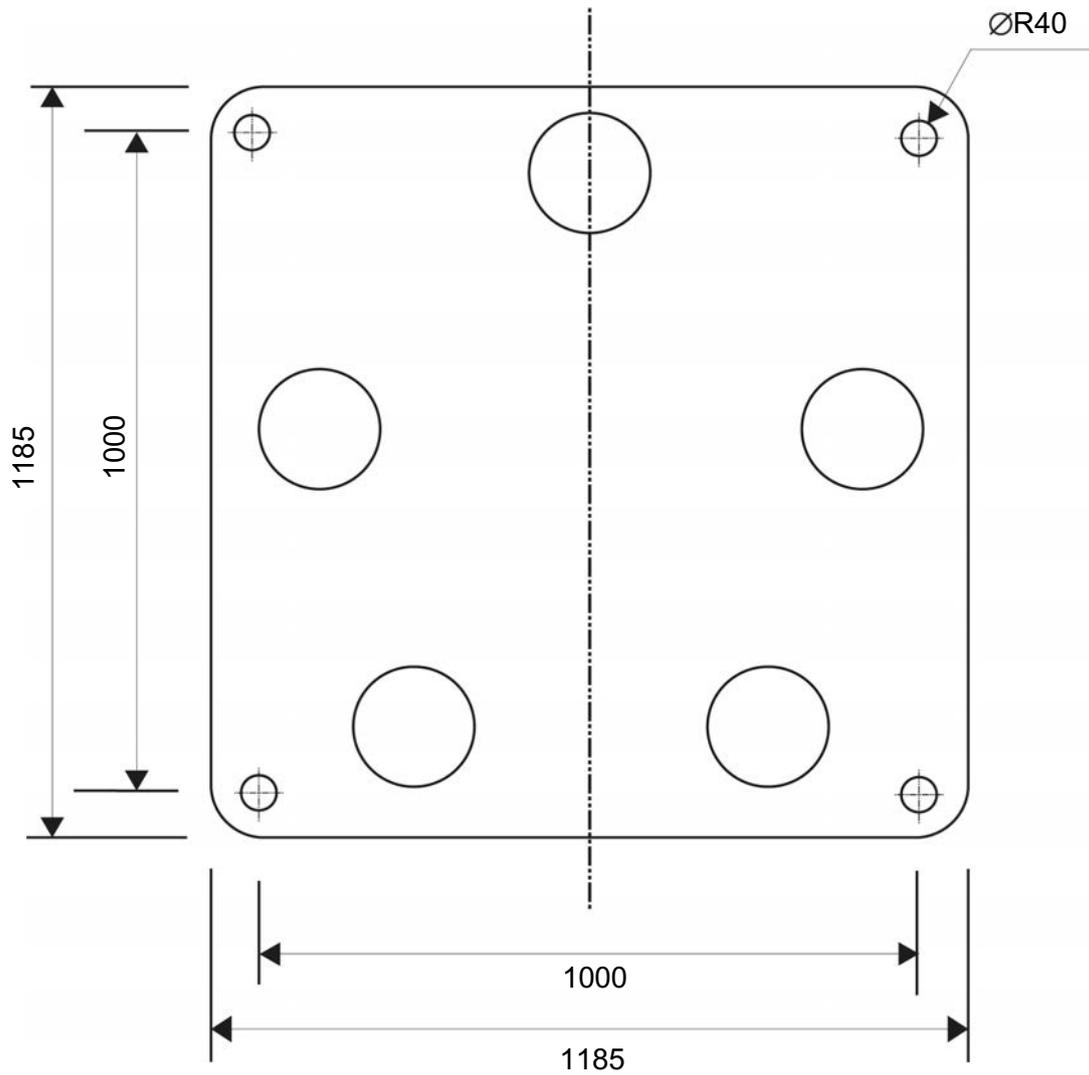


Figure 1: CardioWall Compact mounting points
(Dimensions in mm)



■ Features

- Universal AC input / Full range
- 2 pole AC inlet IEC320-C8
- Medical safety approved (2 x MOPP between primary to secondary)
- Suitable for BF application with appropriate system consideration
- Low leakage current <50uA
- No load power consumption<0.1W
- Energy efficiency level VI(Except 5~9V for Level V)
- Comply with EISA 2007/DoE,NRCan, AU/NZ MEPS, EU ErP and meet CoC Version 5
- Built-in active PFC function
- High efficiency up to 91.5%
- Fanless design with -30~+60°C working temperature
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fully enclosed plastic case
- LED indicator for power on
- 100% full load burn-in test



Power Supply Specification


SPECIFICATION

PRODUCT		GSM60B12-P1J	
OUTPUT	SAFETY MODEL NO.	GSM60B12	
	DC VOLTAGE <small>Note.2</small>	12V	
	RATED CURRENT	5A	
	CURRENT RANGE	0 ~ 5A	
	RATED POWER (max.)	60W	
	RIPPLE & NOISE (max.) <small>Note.3</small>	100mVp-p	
	VOLTAGE TOLERANCE <small>Note.4</small>	± 3.0%	
	LINE REGULATION <small>Note.5</small>	± 1.0%	
	LOAD REGULATION	± 3.0%	
	SETUP, RISE TIME <small>Note.6</small>	1000ms, 30ms / 230VAC 1500ms, 30ms / 115VAC at full load	
HOLD UP TIME (Typ.)	50ms / 230VAC 15ms / 115VAC at full load		
INPUT	VOLTAGE RANGE <small>Note.7</small>	80 ~ 264VAC 120 ~ 370VDC	
	FREQUENCY RANGE	47 ~ 63Hz	
	EFFICIENCY (Typ.)	88%	
	AC CURRENT (Typ.)	1.4A / 115VAC 1A / 230VAC	
	INRUSH CURRENT (Typ.)	30A / 115VAC 65A / 230VAC	
	LEAKAGE CURRENT(max.)	Touch current < 50µA/264VAC	
PROTECTION	OVERLOAD	105 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed	
	OVER VOLTAGE	12.6 ~ 16.2V Protection type : Shut down o/p voltage, re-power on to recover	
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover	
ENVIRONMENT	WORKING TEMP.	-30 ~ +60°C (Refer to "Derating Curve")	
	WORKING HUMIDITY	20% ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH	
	TEMP. COEFFICIENT	± 0.03% / °C (0 ~ 40°C)	
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	
SAFETY & EMC (Note. 8)	SAFETY STANDARDS	ANSI/AAMI ES60601-1 / ES60601-1-11, TUV EN60601-1 / 60601-1-11 approved	
	ISOLATION LEVEL	Primary-Secondary: 2xMOPP	
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC	
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH	
	EMC EMISSION	Compliance to EN55011(CISPR11) class B, EN61000-3-2,3, FCC PART 15 class B,CAN ICES-3(B)/NMB-3(B)	
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN60601-1-2, EN61204-3 medical level, criteria A	
OTHERS	MTBF	720K hrs min. MIL-HDBK-217F(25°C)	
	DIMENSION	125*50*31.5mm (L*W*H)	
	PACKING	0.32Kg; 40pcs/13.8Kg/1.05CUFT	
CONNECTOR	PLUG	See page 3 ; Other type available by customer requested	
	CABLE	See page 3 ; Other type available by customer requested	
NOTE	<ol style="list-style-type: none"> All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. DC voltage: The output voltage set at point measure by plug terminal & 50% load. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. Tolerance: includes set up tolerance, line regulation, load regulation. Line regulation is measured from low line to high line at rated load. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. Derating may be needed under low input voltages. Pleas check the derating curve for more details. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 		




Power Supply Specification

Derating Curve

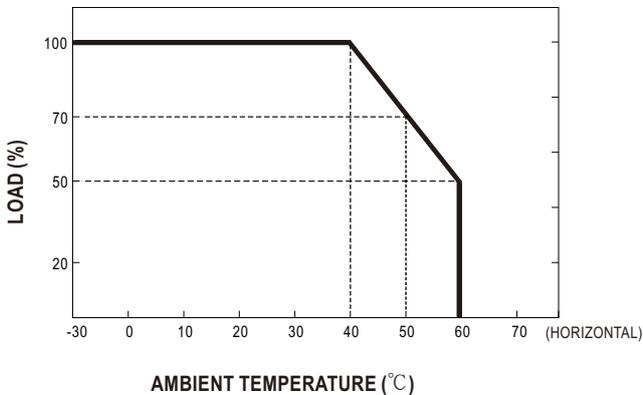


Static Characteristics

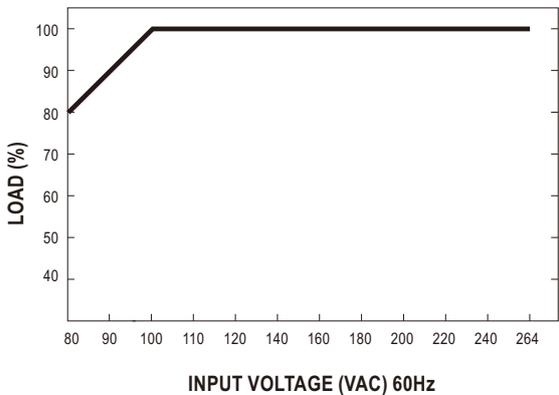

Mechanical Specification

Case No. GSM60B Unit:mm

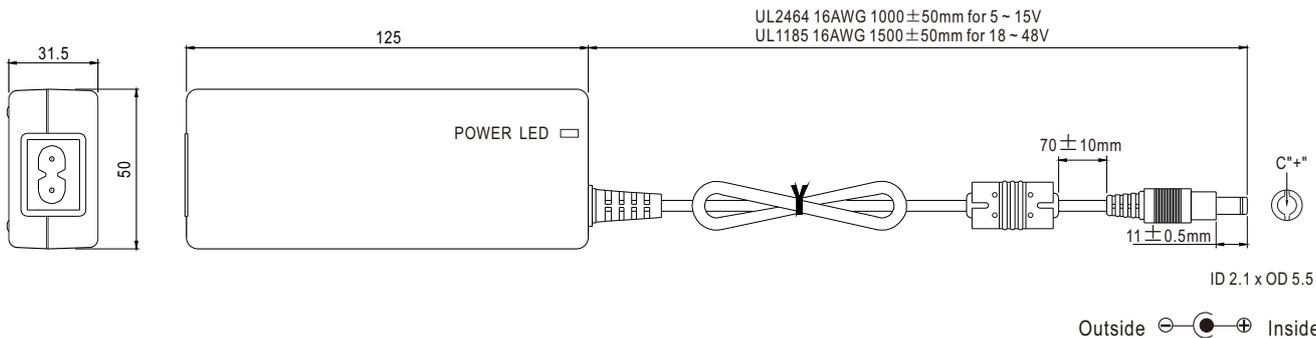

Plug Assignment

Standard plug: P1J

P1J	
P/N	OUTPUT
CENTER	+



CardioWall Compact Installation Checklist

Please complete this checklist after any installation:

Check 1: Pre-power up checks.

Equipment is stable, secure and (if applicable) mounted to a wall of a suitable construction capable of supporting its weight and gameplay.

All fixings are tight and secure.

No signs of damage, component failure and/or missing parts.

No trapped and/or pinched cables.

No loose cables that could become a tripping hazard.

All long cables are supported at least every 50 cm.

Adequate strain relief provided for connection points.

Kept out of direct sunlight during the day.

All electric components away from contact with water.

Protective plastic sheets removed from front graphic panels and each pod.

Check 2: Plug into a mains socket and power up.

All pods light up.

Text appears on the hub display and is as expected. *E.g. Compact Standard.*

Sound volume is at a suitable level*.

Check 3: Select ClearOut (Speed) via Quick Start.

Program counts down from 3 and begins.

All pods active and operational.

Check all pods for colours: red, green, blue.

Sounds can be heard when the lights are hit.

Program plays as described in the Programs Guide.

Check 4: Select Menu then select ClusterShot.

- Time selection OK?
- Level selection OK?
- Program counts down from 3 and begins.
- All pods active and operational.
- Check all pods for colours: red, green, blue.
- Sounds can be heard when the lights are hit.
- Program plays as described in the Programs Guide.

Check 5: Select Combat via Quick Start (*connected Compact Duo only*).

- “Play the other wall”* can be heard.
- Confirm ‘Combat’ program by selecting the Quick Start on the opposite wall.
- Program counts down from 3 and begins on both units simultaneously.
- Selection of a pod on one CardioWall causes a pod to light up on the opposite CardioWall.
- Sounds can be heard when the lights are hit.
- Program plays as described in the Programs Guide on both units.
- Celebration sounds can be heard from the ‘winning’ CardioWall.
- Disappointment sounds can be heard from the ‘losing’ CardioWall.

Check 6: Ready for use.

- Play area is clear.
- Instruction / training carried out by an appropriate instructor to all new users.

If anything unexpected occurs or problems persist after troubleshooting, call Rugged Interactive directly on +44 (0) 1726 833 882.

* If no external volume control is provided (usual for most CardioWalls), the volume can be adjusted on the main hub. The volume control (a small blue control) can be seen through the score window on the bottom left of the PCB. The volume can be adjusted by projecting a tiny flat-bladed screwdriver through the provided hole on the front of the graphics panel. Rotate clockwise for volume up, counter-clockwise for volume down.



Rugged Interactive

Unit 1, Callywith Gate
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

Next Steps

Train team members

Train your team members on how to use CardioWall Compact, having knowledge of the gameplay will help them encourage users. Inspire them to cheer and celebrate with the users when they achieve high scores.

Maintenance

General care and maintenance procedures for your Rugged Interactive product.

1. Inspect the product daily for any signs of damage or loose components. Repair or tighten as applicable.
2. Turn on the product, check the LEDs and sound is working as expected.
3. Start a game, check all pods/sensors work and react as expected. Please refer to the manual for instructions on gameplay.
4. If a pod has seven (7) or fewer working LEDs, we recommend replacing the pod.
5. We suggest non-solvent glass cleaning spray, avoid spraying directly onto the pods. Use a non-abrasive microfibre cloth and extremely light pressure when wiping the product. Too much pressure will scratch the graphics panel.
6. Only use accessories recommended by the manufacturer with the products. Accessories not recommended could cause serious damage.
7. Every three months check the fixings are tight.
8. Once a year, check the structure supporting the product is still solid.
9. We recommend turning the products off when they are not in use (close of business), this will help to extend the life of the product.

Marketing

With this being such an eye-catching product, it is excellent for use in posts on social media, either featuring in photos or videos.

If you would like any help, guidance or examples of using this product in your marketing campaign, please contact Rugged Interactive and we will be able to assist with this.



Rugged Interactive

Unit 1, Callywith Gate
Callywith Industrial Estate, Bodmin
Cornwall, UK
PL31 2RQ

+44 (0) 1726 981 123

www.rugged-interactive.com

hello@rugged-interactive.com

Congratulations!

Congratulations on your new Rugged Interactive product! Your customers are going to love this, and it is a great addition to your venue!

If there is anything we can assist with or if you would be interested in information about any other Rugged Interactive products, then please do not hesitate to get in contact.